




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|--|
| (51) International Patent Classification ⁷ : B41N 1/12 | A1 | (11) International Publication Number: WO 00/69650 (43) International Publication Date: 23 November 2000 (23.11.00) |
| (21) International Application Number: PCT/US00/12854 (22) International Filing Date: 11 May 2000 (11.05.00) (30) Priority Data: 09/312,188 14 May 1999 (14.05.99) US (71) Applicant: PCC ARTWORK SYSTEMS [US/US]; 219A Rittenhouse Circle, Bristol, PA 19007 (US). (72) Inventor: SAMWORTH, Mark, R.; 742 Westcliff Road, Wilmington, DE 19803 (US). (74) Agents: GOLIAN, Paul, D. et al.; Ratner & Prestia, P.O. Box 7228, Wilmington, DE 19803 (US). | | (81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> |
| (54) Title: FLEXOGRAPHIC PRINTING PLATE HAVING IMPROVED SOLIDS RENDITION (57) Abstract <p>A flexographic printing plate (34') having solid image areas (36') which are covered by a plurality of very small and shallow cells (38) similar to the ink carrying cells (42) found in anilox ink metering rolls (40). These cells (38) fill with ink (39) during the plate inking step and reproduce solid image areas (36') with better color saturation while at the same time reducing the halo typical of flexographic printing of solids. Associated with this plate (34') is a method for producing the cells (38), including the use of an intermediate screened film and of a computer program for generating the film intermediate.</p> | | |

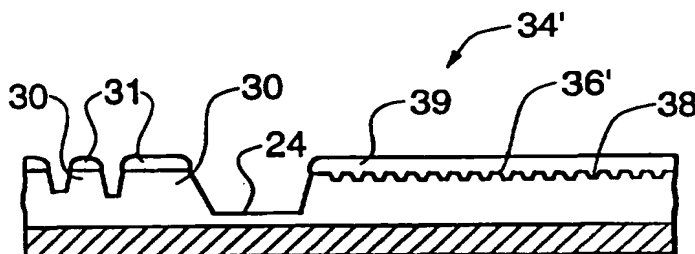

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | NZ | New Zealand | | |
| CM | Cameroon | | Republic of Korea | PL | Poland | | |
| CN | China | KR | Republic of Korea | PT | Portugal | | |
| CU | Cuba | KZ | Kazakstan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

- 1 -

FLEXOGRAPHIC PRINTING PLATE HAVING IMPROVED SOLIDS RENDITION

BACKGROUND OF THE INVENTIONField of the invention

This invention relates to flexographic printing and more particularly to a
5 flexographic printing plate having a plurality of ink carrying cells in the solids areas, and the
method for making such plates.

Description of Related Art

Flexography is a direct rotary printing method that uses resilient relief image plates
of rubber or other resilient materials including photopolymers to print an image on diverse
10 types of materials that are typically difficult to image with traditional offset or gravure
processes, such as cardboard, plastic films and virtually any type of substrate whether
absorbent or non absorbent. As such it has found great applications and market potential in
the packaging industry.

Flexographic printing plates are normally affixed onto a printing cylinder for
15 printing. As shown in figure 1 an ink fountain pan 10 supplies ink to a metering roll 14. An
optional doctor blade 12 may be used to wipe off excess ink from the metering roll to assist
in controlling the amount of ink that is on the metering roll. The flexographic printing
plates 16 are mounted on the printing cylinder 18. The material to be printed, usually
supplied as a continuous web 19, is placed between the printing roll 18 and a backing roll
20 20. The flexographic printing plate is brought against the material typically with just
sufficient pressure to allow contact between the relief image on the plate and the material
printed.

Flexographic printing plates can be made of either vulcanized rubber or a variety of
radiation sensitive polymer resins, typically sensitive to ultraviolet radiation. A well known
25 such flexographic photosensitive polymer resin plate is Cyrel®, a product of E.I. DuPont de
Nemours and Co. Inc. which was introduced in the mid seventies and has since found
widespread acceptance by the printing industry.

- 2 -

Flexography printing is a printing process whereby ink is transferred through a metering roll to the relief portions of the printing plate and therefrom in a process akin to stamping from the relief plate areas to the printed surface. In order to produce good images it is essential that the ink applied to the printed surface is applied uniformly and predictably.

5 This in turn requires that the relief areas in the flexographic plate carry ink in a uniform layer and in predictable amounts.

The prior art has attempted to solve this problem by using a special ink metering roll which is known as an anilox roll. Anilox rolls have on their surface a plurality of ink metering cells. These cells are small indentations arrayed in regular patterns of a
10 predetermined frequency and of uniform depth and shape. Typically they are created by engraving the cylinder face by a mechanical process or by laser. The amount of ink delivered by the anilox roll is controlled by the screen size of the cells.

In operation ink is transferred from the ink well onto the anilox metering roll 14 filling the cells. The optional wipe blade 12 wipes off excess ink from the roll surface
15 leaving only the cells filled. The ink from the cells is then transferred onto the flexographic plate relief areas as the anilox roll and the flexographic plate rotate in contact with one another.

Flexographic printing is what may be termed as a binary system. That is it either prints or it does not. Whenever relief areas contact the printed surface, one gets a
20 substantially solid color area. To create a gray scale, a process called half-toning is used. This is a well known process wherein gray tones are reproduced by printing a plurality of minute solid dots per unit area and varying either the frequency of the dots per unit area or the size of the dots per unit area or both.

It has been observed, and is a well known problem in flexographic printing that solid
25 areas, that is areas in the image where there are no half tone dots, appear to print with less saturation and somewhat less uniformity than halftone areas representing dark image areas. Thus an area with a dot coverage of 95% to 98% appears darker than a solid area (100%). Furthermore, solid flexographic image areas tend to show a "halo" around the solid area, that is, a darker border around the solid image area.

- 3 -

As mentioned earlier, flexography's primary application is packaging. Due to product competition, the market requirements on the printing quality of the images on the packaging are becoming very stringent. There is thus a need for flexographic printing plates that alleviate these problems and deliver a better quality image.

5

SUMMARY OF THE INVENTION

This invention attempts to alleviate the above problems through a flexographic printing plate having a plurality of ink carrying cells on its solid relief printing areas. This plurality of ink carrying cells is arrayed in a regular pattern along rows and columns, and typically the rows form a 90° angle with said columns.

10

Because the flexographic plates are used with anilox rolls for inking and because the anilox rolls also have ink carrying cells on their surface, it is also an object of this invention to provide flexographic printing plates in which the rows and columns of the flexographic plate ink carrying cells form an acute angle with the rows and columns of the cells of the anilox roll cell array respectively, preferably an angle of between 15 and 45 degrees. Ideally

15

this angle is 30 degrees.

Still according with this invention, there is provided a method of forming a flexographic printing plate by first identifying relief areas of the plate representing solid image areas and then by creating either by laser exposure or etching or any other convenient means an array of a plurality of shallow ink carrying cells on the surface of the relief areas

20

identified as representing solid image areas.

It is a further object of this invention to provide an imaged screened film intermediate representing an image having solid image areas for use in preparing a flexographic printing plate wherein the solid image areas reproduced on said screened film intermediate comprise a dot pattern formed by an array of a plurality of distinct dots arrayed

25

along preselected directions.

To achieve the above objectives it is a further object of this invention to provide a machine readable program for use in a computer to control an imagesetter to produce a

- 4 -

screened film for use in making a flexographic printing plate said program performing the steps of:

- (a) storing imaging information representing an image including a solid area;
- (b) supplying said imaging information to an imagesetter adapted to expose
5 photosensitive film; and
- (c) supplying information to said imagesetter for exposing said film to produce an imaged screened film intermediate having areas representing said image solid areas wherein the solid image areas reproduced on said screened film intermediate comprise a dot pattern formed by an array of a plurality of distinct dots arrayed along
10 preselected directions.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention can be more fully understood from the following description thereof in connection with the accompanying drawings described as follows.

Figure 1 shows a schematic elevation of the various basic elements of a single color
15 flexographic printing press.

Figure 2 shows a schematic elevation cross section of an inked flexographic printing plate solid image area according to the prior art.

Figure 3 shows a schematic elevation cross section of an inked flexographic printing plate solid image area according to this invention.

20 Figure 4 shows a top view of an enlarged portion of the solid image area of the flexographic printing plate of figure 3.

Figure 5 shows a side by side cross section comparison of an anilox roll and a solid area of a flexographic plate.

25 Figure 6 shows a top view of a side by side comparison of an anilox roll surface and a flexographic printing plate and the relative orientation of the rows and columns in each.

- 5 -

Figure 7 shows an ink cell distribution on a solid surface that results in a problem identified as scalloped edges.

Figure 8 shows a preferred computer generated plate ink carrying cell top view produced using a plurality of pixels.

5

DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

Throughout the following detailed description, similar reference characters refer to similar elements in all figures of the drawings. Such figures as included herein are for illustration of particular aspects of the invention and therefore are not drawn to scale.

10 The preparation of a flexographic printing plate is well known technology, and is described, inter alia, in a certain publication entitled "Flexography, principles and practices", 4th edition, 1991 published by the Flexographic Technical Association Inc. Because of the popularity of photosensitive flexographic printing plates, we will often refer to such plates in the description of the present invention, with the understanding that such reference is only for the purpose of describing typical embodiments rather than to limit this
15 invention to photopolymerizable flexographic printing plates.

In a preferred embodiment of the present invention, a flexographic plate is prepared substantially as described in pages 130 through 134 of the aforementioned publication, "Flexography, principles and practices".

20 The images typically reproduced by today's flexographic plates almost always include both solid image areas and a variety of gray tone areas. By solid areas we mean areas completely covered by ink having the highest density the ink can produce on a given material. By gray areas we mean image areas where the appearance of the printed image is of a density intermediate to pure white (total absence of ink) and solid. Gray areas are produced by the aforementioned well known process of half-toning, wherein a plurality of
25 relief surface areas per unit area of progressively larger surface area are used to produce the illusion of different density printing. These relief areas are commonly referred to in the printing industry as "dots" and are produced in regular repeating patterns of X-number of dots per linear inch. These patterns are identified by the percentage coverage of a given area

- 6 -

by the dot surface area within the given area as 1% dots, 5% dots 95% dots 98% dots etc. A 98% dot means that 98% of a given area is occupied by the dot surface size. A 2% dot means that 2% of the same given area is occupied by the dot surface area therein.

5 In an alternate embodiment rather than changing the dot size, the dot size is held constant and the frequency of occurrence of the dots is increased to produce higher and higher surface area coverage. Finally, as described in my U.S. patent number 5,892,588, a combination of the two techniques may be used to improve the visual appearance of the printed image.

10 In a flexographic plate, as shown in figure 2, these dots 30 are relief areas having their surface 32 at the top surface of the plate. The plate in the area surrounding the dot 30 has been etched to a depth which except for the darkest areas reaches to a floor 24. The height of the dot is the distance of the surface of the dot (and plate surface as well) to the floor. We will refer to this dot height as the halftone relief. This relief decreases as the % dot coverage increases. However this relief is sufficient to confine ink 31 to the dot surface.

15 Halftone relief is controlled by a number of factors, including the etching process used to remove the material from the between the dots. In a photopolymer flexographic printing plate the maximum relief is controlled by a back exposure of the plate which hardens the photopolymer to a given depth and establishes an absolute floor and thus a maximum relief.

20 Whether the plate is a photopolymerizable plate or an etchable plate, the halftone pattern is produced using a mask which in the photopolymerizable plate case comprises a sheet of exposed and developed photographic film. We will refer to this mark as the screened film, intermediate. The screened film intermediate has a negative pattern of the dots that are to be reproduced on the plate, and in essence comprises a plurality of darkened areas representing the spacing between the dots, and a plurality of transparent areas
25 representing the dots. This screen is placed on the plate and light is shone through the screen to expose the plate. Exposure hardens the plate in the transparent screen areas and after processing the unexposed areas are washed off leaving the relief dots behind.

- 7 -

As the percentage area coverage increases, the dots eventually contact and blend with each other so that after a 50% coverage is reached one no longer has isolated relief areas per dot, but isolated holes separating the dots, extending from the surface of the plate toward the floor.

5 As the dot coverage increases these holes become smaller and smaller and progressively less deep. The relief of the dot (or the depth of the hole) is dependent on the dot separation (or the diameter of the hole). Upper limits of flexographic printing plates are 98% dot coverage before plugging of the holes occurs, with 95% being a more realistic figure. This effect is used in the present invention to create a plurality of shallow ink
10 carrying cells in the surface of solid areas in a flexographic plate to improve printing of solids.

It was stated earlier that a problem in printing solids in flexography was uneven ink transfer over the full solid area, lack of density and a halo effect along the edges of the solid area. The present invention alleviates these problems by improving the ink carrying ability
15 of the solid areas of the flexographic printing plates by providing in that surface a plurality of ink carrying cells as shown in figure 3.

When one compares the solid area 36 of a flexographic plate 34 as shown in figure 2 with the same area shown in figure 3 one sees that the surface 36' of the plate 34' in figure 3 is no longer smooth but it is dotted with a plurality of ink carrying cells 38. These cells do
20 not extend to the floor 24 but are rather shallow in depth and are arrayed in a much higher frequency pattern than the halftone dots. For example the halftone dot pattern in flexographic plates is of the order of a 100 to 150 dots per inch (or lines per inch, lines per inch being a term often used in the industry) while the ink carrying cells are arrayed at frequencies of 500 to 1000 dots (or lines) per inch. Such cell frequencies are similar to the
25 cell frequencies of the ink carrying cells found in the anilox cylinders (which also typically vary between 500 and 1000 lines per inch) and serve the same purpose as the anilox cylinders, that is to carry ink. Ink from the anilox cylinder is picked up by the flexographic plate and fills the cells as well as bridges over the cells on the solid areas. The cells appear to behave as anchor points for the ink film 39 creating an even ink distribution over the
30 solid surface area and substantially eliminating ink accumulation or beading, usually

- 8 -

observed along the solid image area edge. Printing of solids is thus very uniform and has good saturation and density, exceeding the saturation and density obtained by the traditional smooth solid printing surface used heretofore.

There are a number of design parameters that must be observed if one is to obtain the best results with this invention. It is important that the plate cell ink carrying capacity per unit area be at most equal to or, preferably less than the ink carrying capacity of the anilox cylinder. If this is not observed, there may be insufficient ink transferred to the printing plate and therefrom to the printed surface, resulting in less than perfect solid density in the printed surface. To prevent such "ink starving" problem, the plate 37 cells 38 as shown in figure 5 are smaller (i.e. have less depth, or may have a smaller diameter) than the anilox metering roll 40 cells 42

The second important point is the nature of the distribution of the ink carrying cells. The cells in both the anilox rolls and the plate are preferably arrayed in rows and columns. In order to avoid formation of Moiré patterns from the superposition of the anilox roll cell pattern onto the plate cell pattern, it is preferred that the plate cell rows and columns form an acute angle between the anilox rows and columns respectively, as shown in figure 6. As shown in figure 6, the ink carrying cells 38 of the solid surface area 36' are arrayed in rows along a first orientation, indicated by dotted line 44. This orientation forms an angle α with the rows of the cells 42 on the anilox roll 40 which are arrayed along a second orientation, indicated by dotted line 46.

It has been the printing industry experience that an acute angle α between 15 and 45 degrees is optimum for avoiding Moiré interference patterns when using superposed halftone images with anilox rolls or with other halftone images (as in the case of multicolor printing). It has been our observation that the same principles in selecting this angle α also apply to the present invention if one is to avoid offensive artifacts in the printed image.

Therefore, in laying out the cell pattern on the plate solid areas, the relative orientation of the plate to the anilox roll must be considered and the plate pattern of cells arranged such that the plate cells columns and rows are arrayed at an angle between 15 and

- 9 -

45 degrees relative to the anilox roll cells rows and columns respectively. A preferred value for this angle α is 30 degrees.

In addition, if four color printing is the end result, this relationship must preferably be maintained to the extent possible in all four color separation plates and all four anilox
5 rolls, as well as between all four color separation plates alone.

Figure 7 illustrates a possible problem when using the present invention. Assuming that the solid image area 50 in which the ink carrying cells will be placed has a surrounding edge 51 and that a given pattern of ink cells will be created covering the area within the edge 51, it is likely that a number of ink carrying cells 52 will fall on the edge, and will thus
10 be incomplete cells. The result is that the printed solid area edges have a scalloped appearance, typical of gravure printing.

This scalloped appearance may be eliminated by setting a predetermined distance "B" from such edge within which no cells are created, as shown in figure 4. Such distance is preferably of the order of 20 to 100 microns.

15 To produce a flexographic printing plate according to the present invention, one preferably begins with the creation of a screened film intermediate of the images to be printed. When multiple color printing is involved there will be usually four such film intermediates each representing a color separation as is well known in the art.

20 These film intermediates may be produced by traditional photographic methods or as is more likely today by a computer controlled film exposure device such as an imagesetter (laser printer) and an associated properly programmed computer.

The computer may be programmed through appropriate software to generate a halftone film negative in a manner disclosed in my aforementioned U.S. patent number 5,892,588 or in any of the traditional half-toning processes well known in the art. The
25 computer controls the laser printer and creates the half-tone dots by exposing or not exposing individual picture elements or Pixels. A combination of a plurality of pixels is used to form dots of different areas. Again this is well known technology and is shown, inter alia, both in the aforementioned U.S. patent number 5,892,588 and in numerous other

- 10 -

publications including U.S. patent number 3,916,096 issued to Everett et al. and U.S. patent number 5,016,191 issued to Radochonski.

Regardless of the screening process selected for the half-tone process for a particular image, be it stochastic or conventional line screening, in accordance with this invention a
5 required step is the identification of the solid areas in an image, and the solid image area edge coordinates. This information is stored and used to control the exposure device to produce the dot pattern required to create the ink carrying cells.

Using this information, the exposing laser beam of the imagesetter scans the identified solid areas of the film at a rate and at a pixel size sufficient to produce cells at a
10 line frequency of between 500 and 1000 cells per inch. Typically this is done using a laser beam focussed to a pixel size of a few microns, i.e. 7 to 14 microns. A number of these pixels are combined to form a dot.

Figure 8 shows a portion of a screened film intermediate solid image area prepared according to this invention. A tile size is first calculated. A tile 60 consists of a
15 predetermined number of pixels 62 arrayed in two dimensions along the scanning path of the laser beam. These tiles are repeated side by side to cover the full solid area. Figure 8 shows four such tiles.

The dot that will be used to eventually generate the ink cell represents a darkened area within one such tile. In figure 8 each tile consists of nine pixels. In calculating which
20 of the nine pixels will be exposed by the laser beam to produce a proper dot on the film intermediate, the following requirements must be satisfied. (1) The dots must generate cells having a dimension such that their ink carrying capacity is less than the ink carrying capacity of the anilox roll cells. (2) The individual ink cells generated must not touch, or in other words there must always be plate surface area (land) between each cell and its adjacent
25 cells. Therefore the dots on the intermediate film must also not touch, i.e. they must be distinct. (3) The cells must be arrayed along a particular frequency and at an angle depending on the anilox cell array. Therefore, the dots must also, preferably, be arrayed and the dot array orientation must be correlated with the anilox cell array orientation. (4) Finally, the resulting cell shape must resemble as much as possible a circle, and therefore

- 11 -

the dot shape must also be chosen to resemble a circle. This last requirement is of lesser significance than the previous three.

The above conditions have been satisfied in figure 8 where each dot consists of nine pixels only four of which are darkened. Such arrangement provides an array that forms a 45° angle with the plate edge, and which, assuming the plate edge is parallel with the plate cylinder axis makes a 45° angle with the anilox cylinder axis. This plate cell angle would be acceptable if the anilox cell array angle makes a 15° angle with its axis as it results in a 30° angle between the plate cell array and the anilox cell array. While not shown in the figure, when a 10 micron pixel is used, the dot frequency is of the order of about 700 to 800 dots/inch. It is preferred that the screened film intermediate dot frequency be equal to or less than the ink cell frequency of the anilox roll that will be used with the plates produced using such intermediate film.

If the laser focus is 10 microns, each pixel is also 10 microns, and the resulting cell size on the plate may be estimated. The maximum diameter of the darkened dots in the screen film made using the pattern of figure 8 is about 30 microns. Using the rule of thumb that the depth of a hole resulting from exposing a photopolymer plate through a mask is results in a hole depth $\frac{1}{2}$ the maximum diameter of the dot, the resulting cell depth is about 15 microns. Thus, the dot size to be used in the intermediate film can be computed so that the resulting cells in the plate hold less ink than the anilox roll cells. The use of computer computational power permits using algorithms involving reasonably accurate approximations of the cell volume, and may be used to calculate intermediate dot shapes and sizes. The simplest approximation is of course a conical cavity having a base diameter equal to the dot max. diameter and a depth equal to $\frac{1}{2}$ the diameter. In an alternate embodiment experimentation may be used to determine optimum dot shape, size and frequency for use with a particular metering roll and plate material.

The film intermediate contains markings for proper orientation and positioning of the film on the plate. These markings allow one to determine the solid image orientation relative to the printing cylinder. This, in turn, permits the array of tiled dots to be created at a particular angular orientation relative to the axis of the cylinder on which the plate is

- 12 -

eventually mounted as mentioned above. Because the printing cylinder axis and the anilox roll axis are parallel and the relative orientation of the anilox roll cells to the anilox roll axis is known, it is possible to orient the plate ink cell array so that the required angle between the plate cell array and the anilox cell array is obtained.

- 5 Preferably no dots are created to within one or two pixels from a solid image area edge to alleviate the scalloped edge problem discussed above.

 The screened film intermediate is next placed on a photopolymerizable plate such as a Cyrel® photosensitive polymer printing plate and the plate is exposed through the film to U.V. radiation. The polymer material under the film dots representing the cells remains
10 unpolymerized to a depth which is approximately 1/2 of the dot maximum width.

 Following exposure the plate is processed in a developer which washes off the unpolymerized areas in the plate. As a result when processing is finished the plate surface bears in the solid image areas a plurality of shallow ink carrying cells having a typical depth of about 15 microns. During this operation, halftone dots in any halftone image areas are
15 processed to a depth which ideally approaches the plate floor. The dot relief in every case is enough so that upon inking of the plate with the anilox roll, only the top surface area of the dot retains ink 31, in the traditional half-tone flexographic printing process, as shown in figures 2 and 3.

 The plates thus formed are aligned and mounted on the printing cylinder and the
20 cylinder is mounted on the press. Printing proceeds in the usual manner.

 Solid areas in printed images that were printed with plates produced according to this invention exhibit higher density and better uniformity in the solid area color and a reduction in halo around the edges of solids, than plates printed with the traditional smooth solid area surface.

25 The previous description refers to a process for making a photopolymerizable plate using a screened film half-tone negative. Such negatives may also be used with a non photopolymer plate, through the use of an intermediate photomask over an etchable plate as is well known in the art. In certain applications rather than making a separate screened film,

- 13 -

a photosensitive coating is placed directly on the plate as a top layer. This layer may then be imaged in the same manner as the screened film and subsequently used as the mask for exposing and processing the flexographic plate.

5 The advent of computers and their wide acceptance in the printing industry, make it likely that the above process will be implemented with a software program that will control a computer. The computer thus programmed will then control a typesetter to produce a film screen intermediate. Such computer program should as a minimum be able to:

- (A) Store and/or retrieve imaging information representing an image including a solid area in a memory.
- 10 (B) Supply this imaging information to an imagesetter adapted to expose photosensitive material.
- (C) Also supply information to the imagesetter for exposing a photosensitive material such as photographic film to produce an imaged screened film intermediate having areas representing the solid image areas. The solid image areas reproduced
15 include a dot pattern comprising a plurality of pixels. The dot pattern may form an array of a plurality of distinct dots arrayed along preselected directions.

Preferably, the program should also be capable of:

- (i) obtaining the orientation of a an array of ink carrying cells on an ink metering roll, such as an anilox roll;
- 20 (ii) computing the position of the solid image area when the flexographic plate using the screened film intermediate is placed in a position for applying ink thereon through the metering roll; and
- (iii) calculating the orientation of the array of the plurality of distinct dots on the solid image areas on the screened film intermediate so that it forms on the printing
25 plate an array of ink carrying cells on the solid image area oriented at an acute angle relative to the metering roll ink carrying cell array, when the intermediate film is used to produce the plate.

- 14 -

Furthermore, the use of a screened film intermediate may be eliminated by the creation of such an intermediate as a virtual intermediate in a computer using appropriate software. This software may then be used to control directly either a laser platemaker or a mechanical engraving device.

- 5 These modifications are to be construed as being encompassed within the scope of the present invention as set forth in the appended claims.

- 15 -

Claims

1. A flexographic printing plate having solid relief printing areas, said solid relief printing areas comprising a plurality of ink carrying cells.
2. The flexographic printing plate according to claim 1 wherein said plurality of
5 ink carrying cells is arrayed in a regular pattern along rows and columns.
3. The flexographic printing plate according to claim 2 for use with an anilox metering roll, the anilox metering roll having an array of inking cells arrayed in rows and columns and wherein said rows and columns of the flexographic plate ink carrying cells form an acute angle with said rows and columns of the cells of the anilox roll cell array
10 when said plate is used with said anilox roll.
4. The flexographic printing plate according to claim 3 wherein the plate rows and columns form an angle between 15 and 45 degrees with the rows and columns of the anilox plate.
5. The flexographic printing plate according to claim 3 wherein the plate rows
15 and columns form a 30 degree angle with the rows and columns of the anilox plate.
6. The flexographic printing plate according to claim 3 wherein the plate cells have a volume and the anilox roll cells also have a volume and wherein the volume of the plate cells is smaller than the volume of the anilox cells.
7. The flexographic printing plate according to claim 3 wherein an amount of
20 ink required to fill the cells in a solid area of the plate is less than an amount of ink carried by the cells in the anilox roll over an area of the anilox roll corresponding to said solid area of the plate.
8. The flexographic printing plate according to claim 2 wherein the cells are arrayed along rows and columns at a frequency of between 500 and 1000 cells per inch.
- 25 9. The flexographic printing plate according to claim 1 wherein the cells extend only to within between 20 and 100 microns from an edge of the solid area.

- 16 -

10. An imaged screened film intermediate representing an image having solid image areas, said intermediate film for use in preparing a flexographic printing plate, wherein the solid image areas are reproduced on said screened film intermediate comprising a dot pattern formed by an array of a plurality of distinct dots arrayed along preselected
5 directions.

11. The imaged screened film intermediate according to claim 10 wherein said screened film intermediate further comprises non solid image areas, said non solid image areas being halftone image areas, and wherein the halftone image areas comprise halftone dots having a first frequency and the solid image areas comprise distinct dots having a
10 second frequency, said second frequency being at least three times higher than the first frequency.

12. The imaged screened film intermediate according to claim 10 wherein said preselected directions form an acute angle with an array of a plurality of cells on an metering roll when the flexographic printing plate prepared using said intermediate screened
15 film is mounted on a printing cylinder and inked by said metering roll.

13. The imaged screen film intermediate according to claim 12 wherein said screen film further contains non solid image areas said non solid image areas being halftone image areas and wherein the halftone imaged areas comprise halftone dots having a first frequency and the solid image areas comprise distinct dots having a second frequency, said
20 second frequency being at least three times higher than the first frequency.

14. A method for producing a flexographic printing plate, the method comprising:

- (a) creating a relief image on said plate, said relief image comprising a solid relief area having a surface; and
- 25 (b) creating on said solid relief area surface a plurality of ink carrying cells.

15. The method according to claim 14, wherein the step of creating the relief image includes the step of exposing said flexographic printing plate through an imaged screened film intermediate representing an image, said image having solid image areas,

- 17 -

wherein the solid image areas reproduced on said screened film intermediate comprise a plurality of distinct ink carrying cells in a pattern designed to prevent Moiré patterns when said flexographic plate is used to print an image.

16. The process according to claim 15 further comprising the step of arraying
5 said plurality of distinct ink carrying cells in an array having a first orientation relative to an array of ink carrying cells on a metering roll, said array of the metering roll ink carrying cells having a second orientation, said first and said orientations forming an acute angle.

17. A method for producing a flexographic printing plate, the method comprising:

- 10 (a) creating a relief image on said plate said relief image comprising a solid relief area having a surface;
- (b) selecting an anilox roll to be used with said flexographic printing plate, said anilox roll having a plurality of ink cells arrayed along rows and columns; and
- 15 (c) creating a plurality of ink carrying cells on said solid relief surface of said flexographic printing plate arrayed along rows and columns, said rows and columns selected such that when said plate is inked by said anilox roll the rows and columns of the flexographic plate cells form an acute angle with the rows and columns of the anilox roll cells.

18. A method for producing a screened film intermediate for use in making a
20 flexographic printing plate comprising:

- (a) storing imaging information representing an image including a solid image area;
- (b) supplying said imaging information to an imagesetter adapted to expose a film comprising photosensitive material; and
- 25 (c) supplying information to said imagesetter for exposing said film to produce an imaged screened film intermediate having areas representing said image solid areas, wherein the solid image areas reproduced on said screened film intermediate

- 18 -

comprise a dot pattern formed by an array of a plurality of distinct dots arrayed along preselected directions.

19. The method according to claim 18 wherein said preselected directions form an acute angle with an array of a plurality of cells on an metering roll when the flexographic printing plate made using said intermediate screened film is mounted on a printing cylinder
5 and inked by said metering roll.

20. A machine readable program for use in a computer to control an imagesetter to produce a screened film for use in making a flexographic printing plate said program performing the steps of:

- 10 (a) storing imaging information representing an image including a solid image area;
- (b) supplying said imaging information to an imagesetter adapted to expose a film comprising photosensitive material; and
- 15 (c) supplying information to said imagesetter for exposing said film to produce an imaged screened film intermediate comprising film areas representing said solid image areas, wherein the film areas reproduced on said screened film intermediate comprise a dot pattern formed by an array of a plurality of distinct dots arrayed along preselected directions.

21. The program according to claim 20 further comprising the steps of:

- 20 (d) obtaining the orientation of a an array of ink carrying cells on an ink metering roll;
- (e) computing the position of the solid image area when the flexographic plate made using the screened film intermediate is placed in a position for applying ink thereon through the metering roll; and
- 25 (f) calculating the orientation of said array of said plurality of distinct dots on said solid image areas on the screened film intermediate to form on said printing plate when said intermediate film is used with said plate, an array of ink cells on said solid

- 19 -

image area of said plate, said array of ink cells on said solid image area of said plate oriented at an acute angle relative to said metering roll ink carrying cell array.

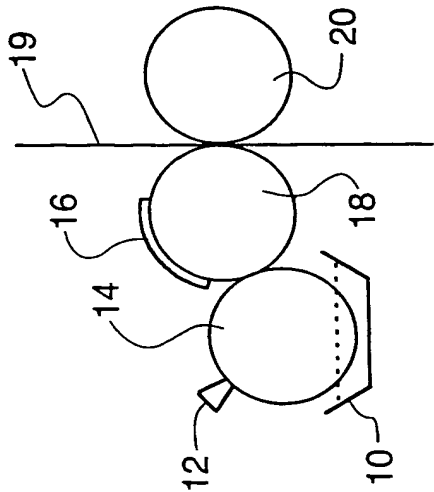


Fig. 1

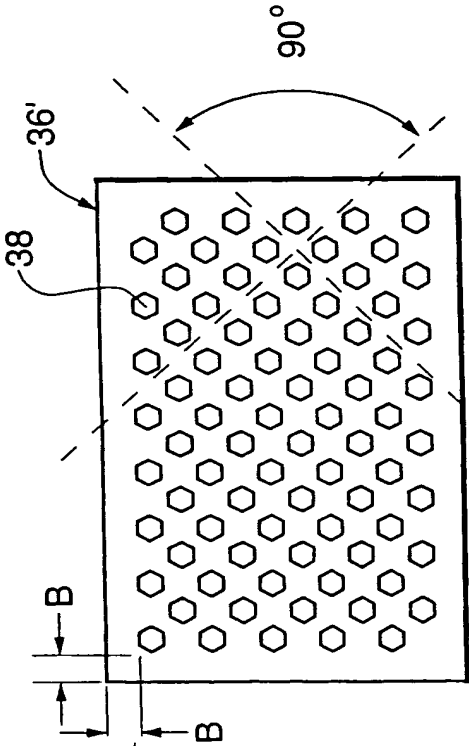


Fig. 4

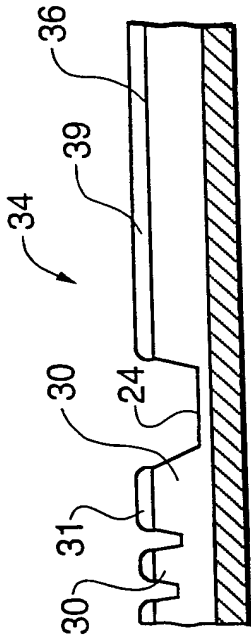


Fig. 2

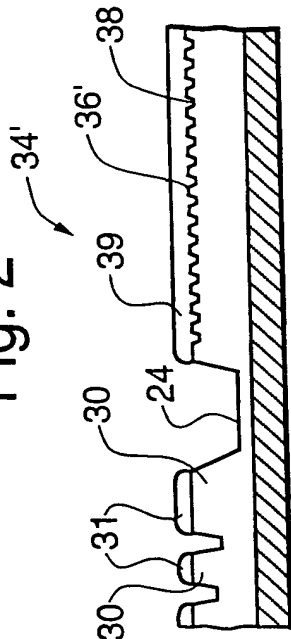


Fig. 3

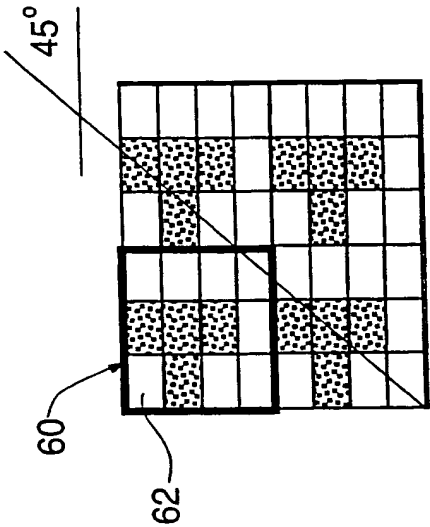


Fig. 8

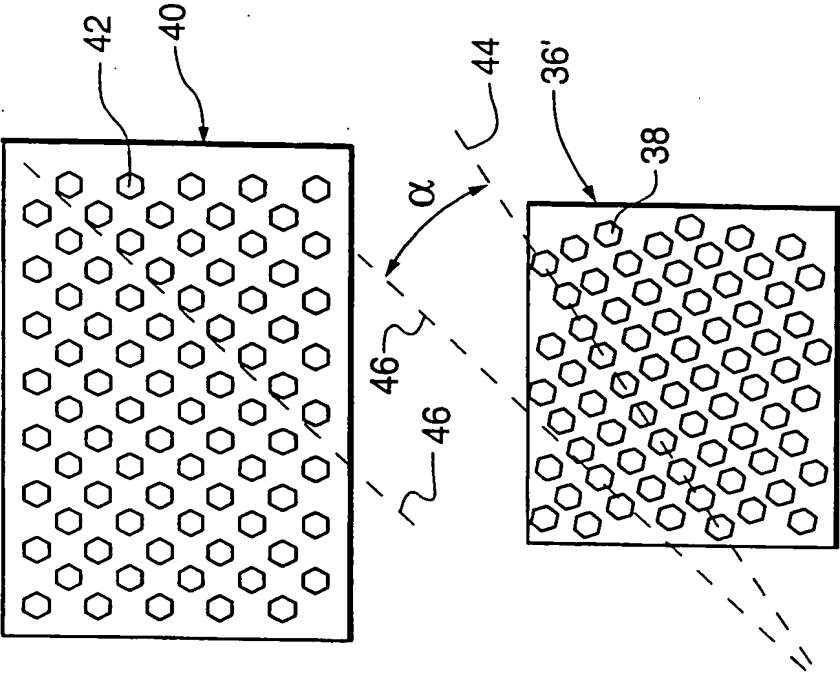


Fig. 6

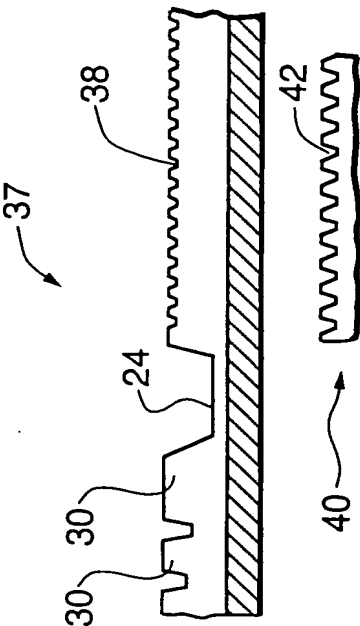


Fig. 5

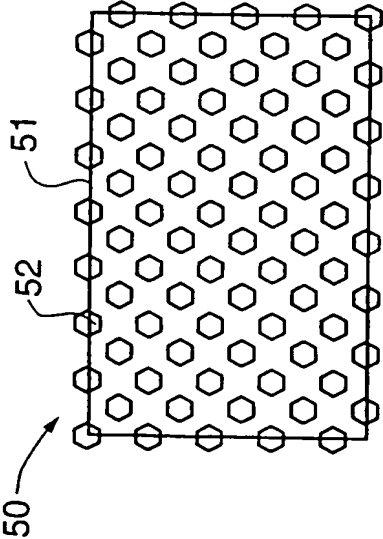


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/12854

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :B41N 1/12

US CL :101/395, 401, 401.1

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 101/395, 401, 401.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
WEST 2.0

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-------------------------------------|
| X | US 4,152,986 A (DADOWSKI et al.) 08 May 1979, entire document. | 1, 2, 10, 14 ----- 3-9, 15-21 |
| Y | US 4,819,558 A (COUNARD) 11 April 1989, col. 2 lines 6-11, col. 2 line 66 - col. 3 line 4, col. 4 lines 14-18, and col. 6 lines 32-37. | 3-7, 12, 15-17, 19, 21 |
| Y | US 3,613,578 A (HEURICH) 19 October 1971, col. 1 lines 25-37 and col. 2 line 61 - col. 3 line 3. | 3-7, 12, 15-17, 19, 21 |
| Y | US 5,435,247 A (GIORI et al.) 25 July 1995, col. 5 line 33 - col. 6 line 15. | 8 |

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

| | |
|---|--|
| * Special categories of cited documents: | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| "A" document defining the general state of the art which is not considered to be of particular relevance | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| "E" earlier document published on or after the international filing date | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "&" document member of the same patent family |
| "O" document referring to an oral disclosure, use, exhibition or other means | |
| "P" document published prior to the international filing date but later than the priority date claimed | |

Date of the actual completion of the international search

17 JULY 2000

Date of mailing of the international search report

29 AUG 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

STEPHEN R. FUNK

Telephone No. (703) 308-0982

Form PCT/ISA/210 (second sheet) (July 1998)*

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/12854

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|--------------|--|-----------------------|
| X -- Y | US 5,884,560 A (OPITZ et al.) 23 March 1999, col. 5 line 41 - col. 6 line 49. | 10 --- 9, 12 |
| Y | US 5,659,385 A (KOLTZ) 19 August 1997, col. 1 lines 4-23. | 18-21 |
| A | US 4,283,484 A (FAIRHEAD et al.) 11 August 1981. | 1-21 |
| A | US 3,891,443 A (HALPERN et al.) 24 June 1975. | 1-21 |

Form PCT/ISA/210 (continuation of second sheet) (July 1998)*

THIS PAGE BLANK (USPTO)